
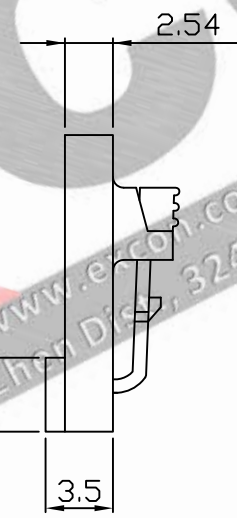
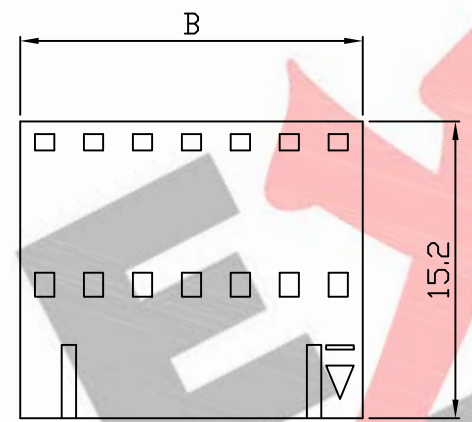
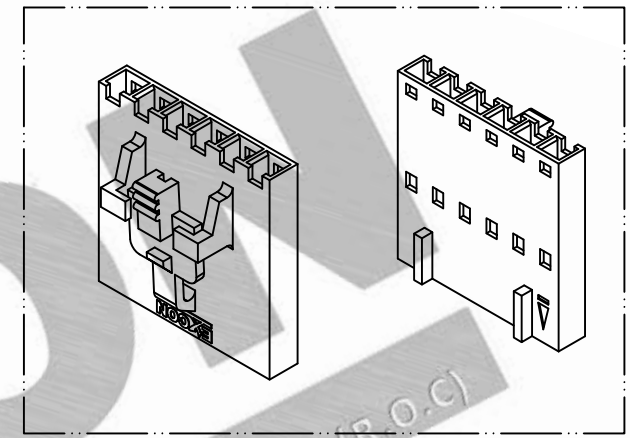
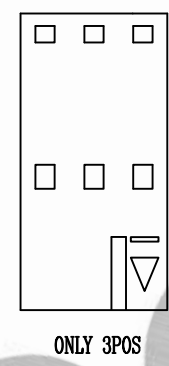
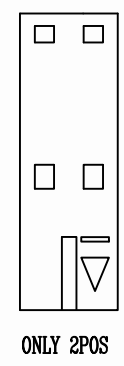


PART NO. 2545xxHA003
 DWG NO. C2545HA

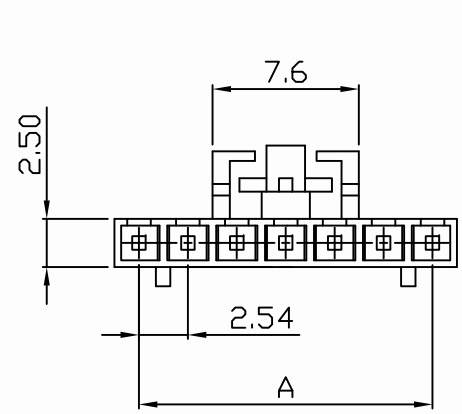

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
254502HA003	2	2.54	5.08
254503HA003	3	5.08	7.62
254504HA003	4	7.62	10.16
254505HA003	5	10.16	12.70
254506HA003	6	12.70	15.24
254507HA003	7	15.24	17.78
254508HA003	8	17.78	20.32
254509HA003	9	20.32	22.86
254510HA003	10	22.86	25.40
254511HA003	11	25.40	27.94
254512HA003	12	27.94	30.48

- NOTE:
1. Housing Material: Nylon UL94V-0
 2. Insulation resistance: 1000M Ω min.
 3. Withstand voltage: 1000V AC/minute.
 4. Current rating: 3A AC/DC.
 5. Voltage rating: 250V AC/DC

				UNLESS OTHERWISE SPECIFIED TOLERANCES	
				3 PLACE ± 0.5 ± 0.10	
				2 PLACE ± 1.5 ± 0.25	
				1 PLACE ± 2.0 ± 0.50	
				ANGLE DIM	
REV.	REVISION		DIS	DATE	
SCALE	REV.	PAGE:	UNIT	mm	
3/1	A	1	THIRD ANGLE PROJECTION	DWG NO: C2545HA	

EXCON
 EXCON TECHNOLOGY COMPANY

PART.NO
 2545xxHA003