

TERMINALS STAMPED WITH THE LETTER "B"
ACCEPT 32-36 AWG WIRE WITH A 0.64 MAX INSULATION DIA


- NOTES:
1. MATERIAL: PHOSPHOR BRONZE
 2. PLATING:
207 = SELECT HARD GOLD: 0.38 MICROMETERS MIN.
SELECT TIN: 2.0 MICROMETERS MIN BOTH OVER NICKEL
206 = SELECT HARD GOLD: 0.75 MICROMETERS MIN.
SELECT TIN: 2.0 MICROMETERS MIN BOTH OVER NICKEL
 3. PRODUCT SPECIFICATION: TERMINALS CONFORM TO PS-70058 AND PS-70400 WHEN CRIMPED WITH MOLEX CRIMP TOOLS.
 4. COSMETIC SPECIFICATION: PS-45499-002 CLASS B
 5. TERMINAL FOR USE WITH HOUSING SERIES 70066 AND 70450
 6. WIRE SPECIFICATION: TERMINALS STAMPED WITH THE LETTER:
B = ACCEPTS 32-36 AWG STRANDED WIRE WITH A 0.64 MAX INSULATION DIA.

TERMINALS ON THIS SHEET ARE FOR USE
WITH 32-36 AWG WIRE.
SEE SHEETS 1 AND 3 FOR OTHER WIRE SIZES

PART NUMBER / ENGINEERING NO	PACKAGING	PLATING SEE NOTE 2	WIRE SIZE	MAX INSULATION DIA
16-02-0074 70058-0015	REEL	207 0.38 GOLD	32-36	0.64 DIA MAX
16-02-0085 70058-0017	REEL	206 0.75 GOLD		
16-02-0101 70058-0217	LOOSE			

(32-36 AWG WIRE)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER AS PER PCN#508517			molex		
mm		8:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)				SL CRIMP TERMINAL					
ANGULAR TOL ± °									
4 PLACES		±		EC NO: 667105			PRODUCT CUSTOMER DRAWING		
3 PLACES		±		DRWN: SUGEEB					

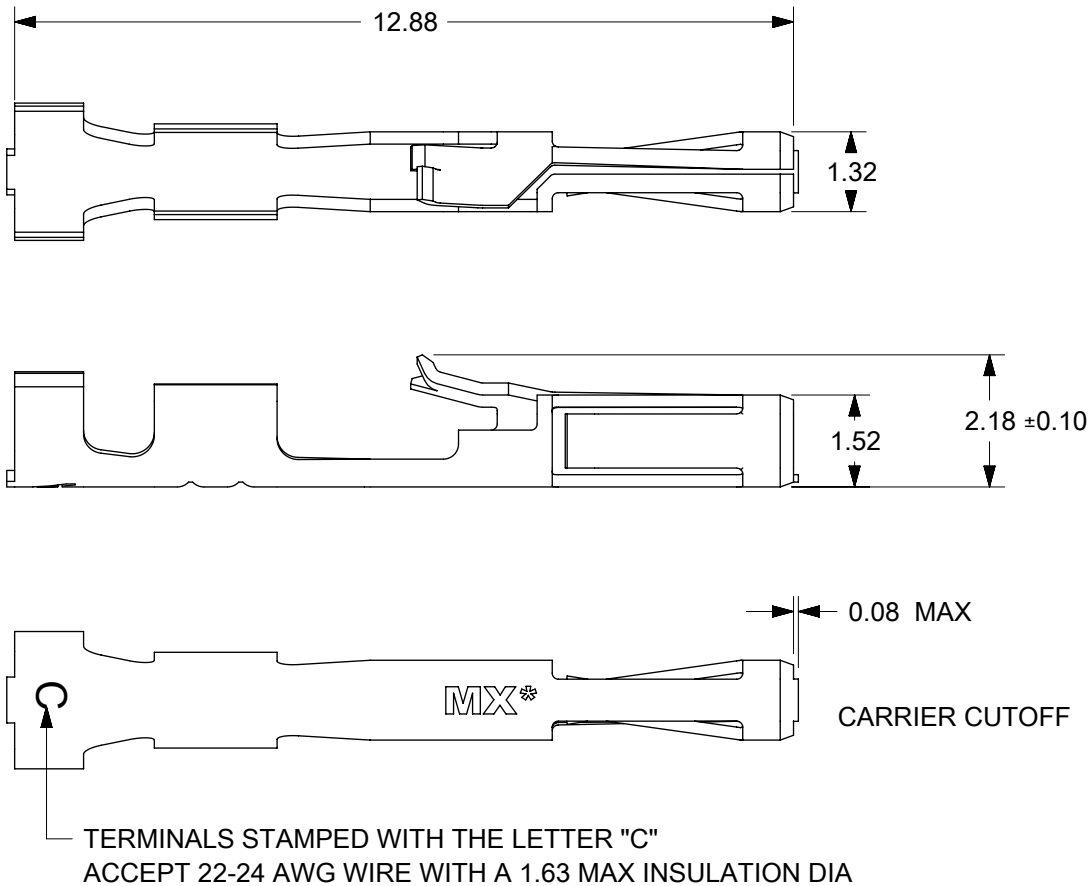

- NOTES:
1. MATERIAL: PHOSPHOR BRONZE
 2. PLATING:
 - 124 = SELECT BRIGHT TIN: 3.75 MICROMETERS MIN OVER NICKEL
 - P124 = PREPLATED BRIGHT TIN: 3.75 MICROMETERS MIN OVER MATTE NICKEL (BARE EDGES)
 - 207 = SELECT HARD GOLD: 0.38 MICROMETERS MIN.
 - SELECT TIN: 2.0 MICROMETERS MIN BOTH OVER NICKEL
 - 206 = SELECT HARD GOLD: 0.75 MICROMETERS MIN.
 - SELECT TIN: 2.0 MICROMETERS MIN BOTH OVER NICKEL
 3. PRODUCT SPECIFICATION: TERMINALS CONFORM TO PS-70058 AND PS-70400 WHEN CRIMPED WITH MOLEX CRIMP TOOLS.
 4. COSMETIC SPECIFICATION: PS-45499-002 CLASS B
 5. TERMINAL FOR USE WITH HOUSING SERIES 70066 AND 70450
 6. WIRE SPECIFICATION: TERMINALS STAMPED WITH THE LETTER:
 - C = ACCEPTS 22-24 AWG STRANDED WIRE WITH A 1.63 MAX INSULATION DIA



TERMINALS ON THIS SHEET ARE FOR USE
WITH 22-24 AWG WIRE.
SEE SHEETS 1 AND 2 FOR OTHER WIRE SIZES

PART NUMBER / ENGINEERING NO:	PACKAGING	PLATING SEE NOTE 2	WIRE SIZE	MAX INSULATION DIA
16-02-0086 70058-0022	REEL	124 SELECT TIN	22-24 AWG	1.63 DIA MAX
16-02-0102 70058-0222	LOOSE			
70058-4086	REEL	124 OVERALL TIN		
16-02-0087 70058-0024	REEL	207 0.38 GOLD		
16-02-0103 70058-0224	LOOSE			
16-02-0088 70058-0026	REEL	206 0.75 GOLD		
16-02-0104 70058-0226	LOOSE			


(22-24 AWG WIRE)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER AS PER PCN#508517			molex		
mm		8:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)				SL CRIMP TERMINAL					
ANGULAR TOL ± °									
4 PLACES		±		EC NO: 667105			PRODUCT CUSTOMER DRAWING		
3 PLACES		±		DRWN: SUGEEB					


DOCUMENT STATUS	P1	RELEASE DATE	2021/06/29	11:14:02
-----------------	----	--------------	------------	----------

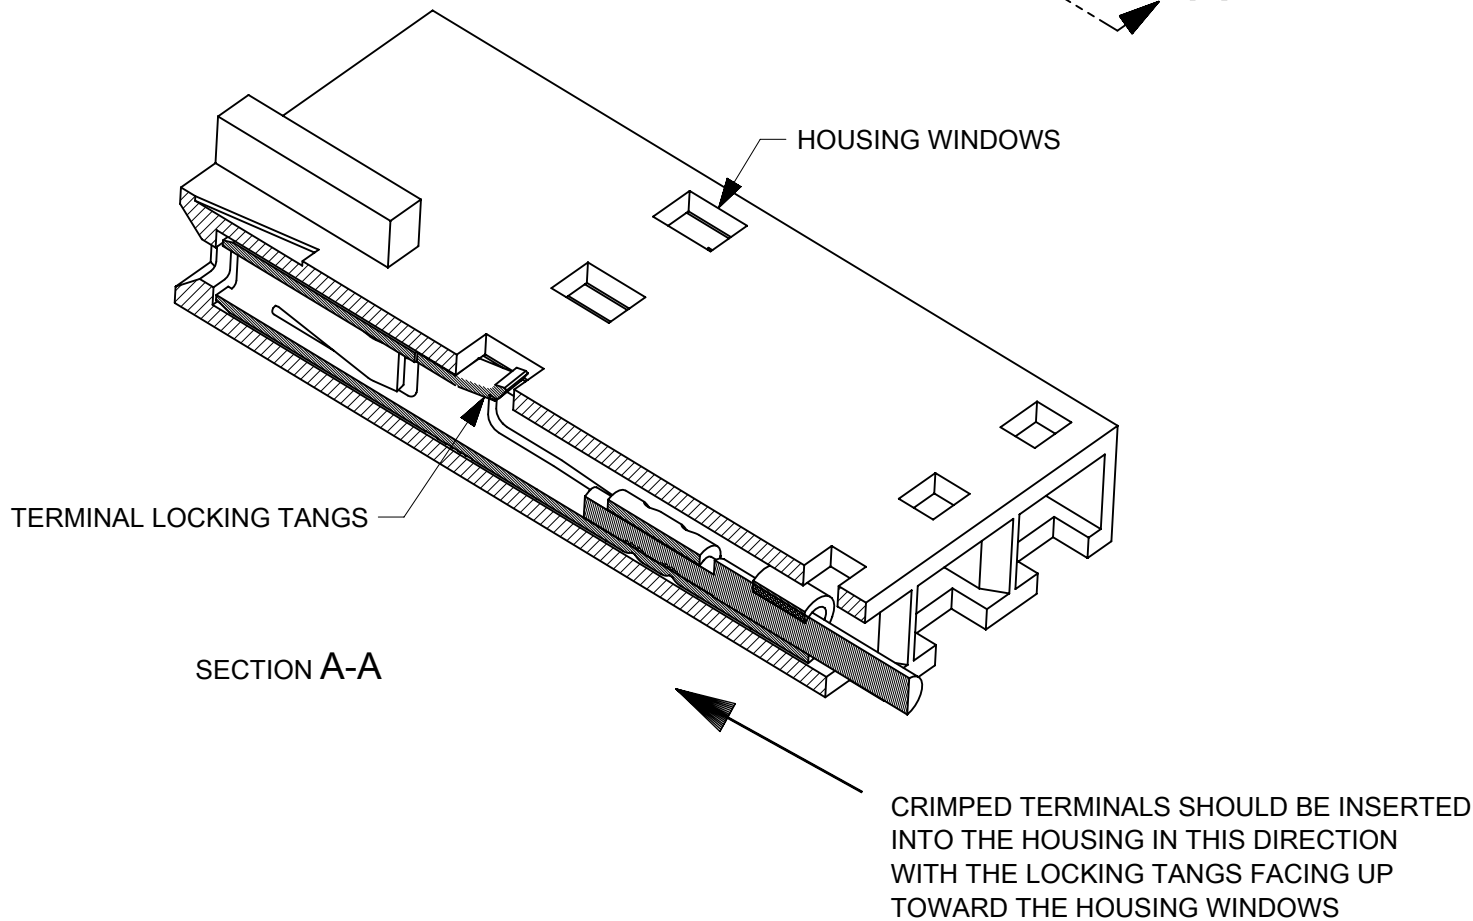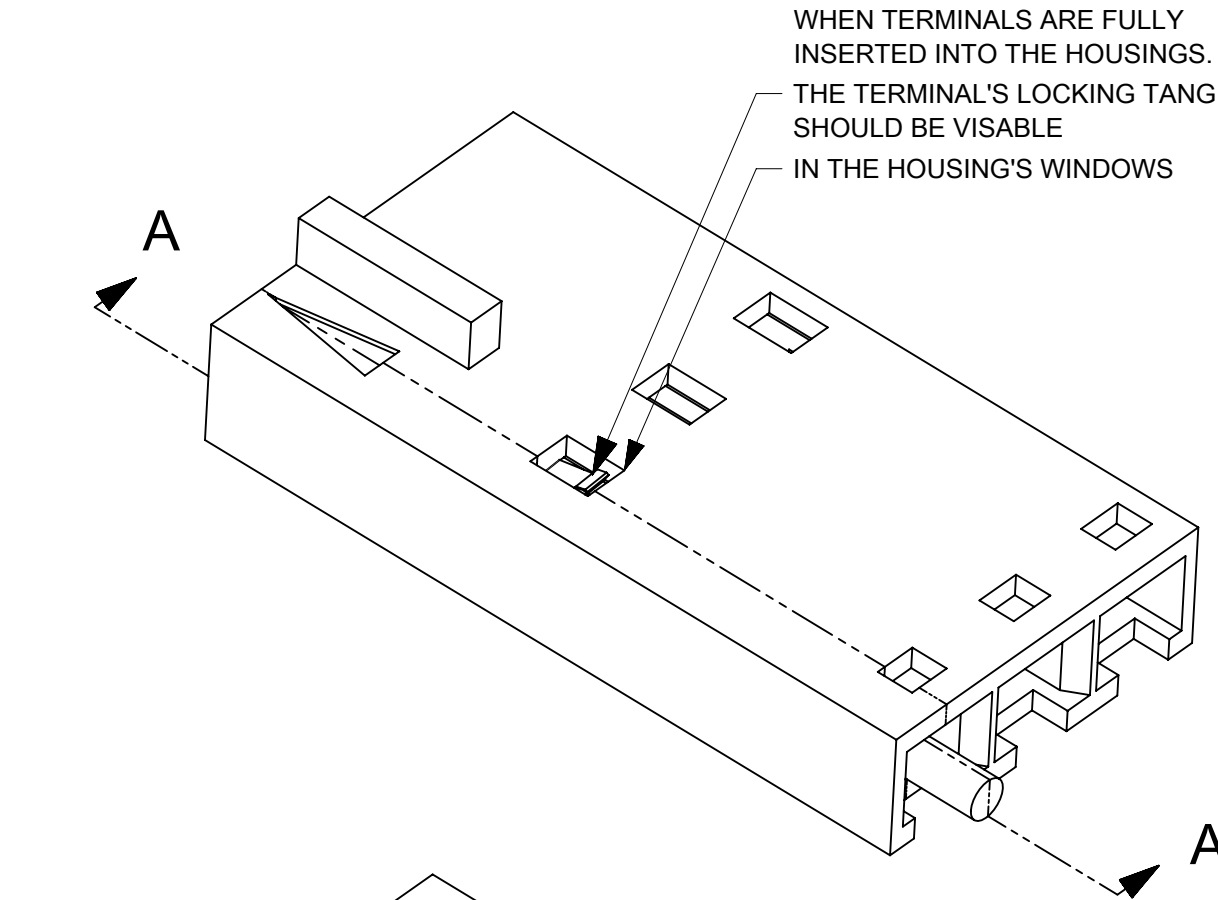

LOOSE PACKED

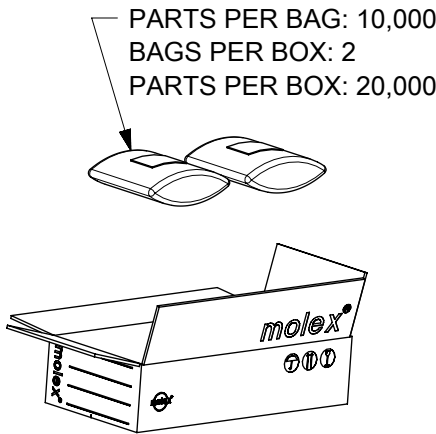

REEL PACKED

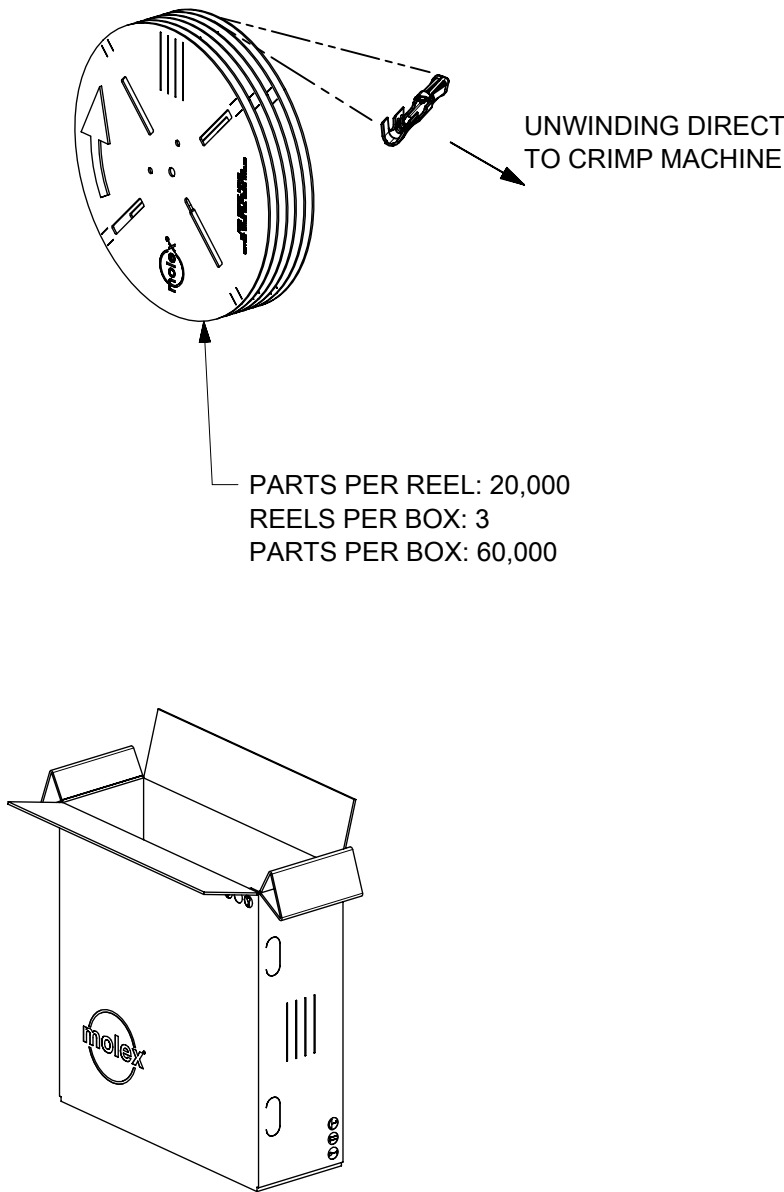

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER AS PER PCN#508517				molex	
mm		1:15							
GENERAL TOLERANCES (UNLESS SPECIFIED)				SL CRIMP TERMINAL					
ANGULAR TOL ± °									
4 PLACES		±		EC NO: 667105 DRWN: SUGEEB					