

CONNECTORS MANUFACTURER






IDC Socket 1.27x1.27mm

Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +65°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT
 Terminal: Copper Alloy

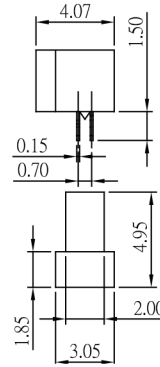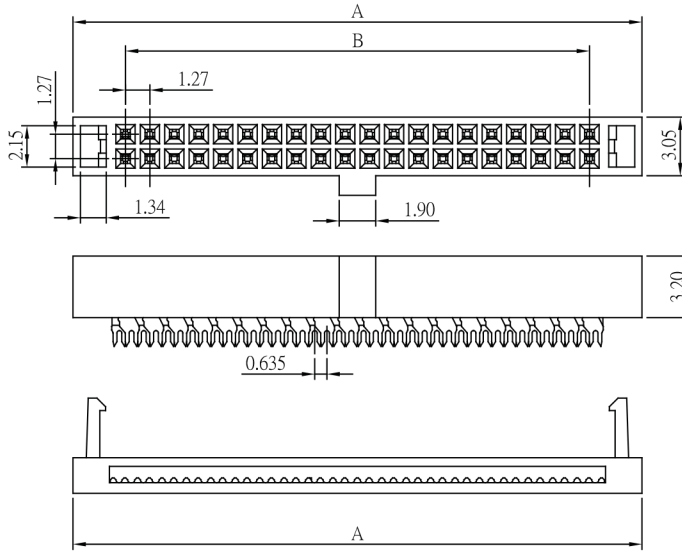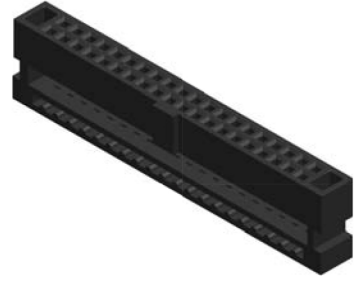

©Mate with flat cable Pitch 0.635 mm

No. of Contacts	Dim. A	Dim. B
10	10.54	5.08
12	11.81	6.35
20	16.89	11.43
26	20.70	15.24
30	23.24	17.78
34	25.78	20.32
40	29.59	24.13
44	32.13	26.67
50	35.94	30.48
60	42.29	36.83
68	47.37	41.91
80	54.99	49.53

DC Socket



ROHS