

8

7

6

5

4

3

2

F

E

D

C


B

A


S51004.S01

回路番号
CIRCUIT NO.

トレードマーク
TRADE MARK



A±0.3

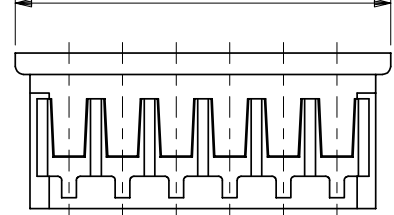

0.7

-A-

C±0.3

B 基準

BSC.

0.55

1.45 基準

BSC.

2 基準 BSC.

ピッチ PITCH


0.45

1.95 基準

BSC.


-B-

1.2




1

⊕ ⌀0.4 A B




1.95 (I)



2極の場合

IN CASE OF 2 CIRCUIT HSG.

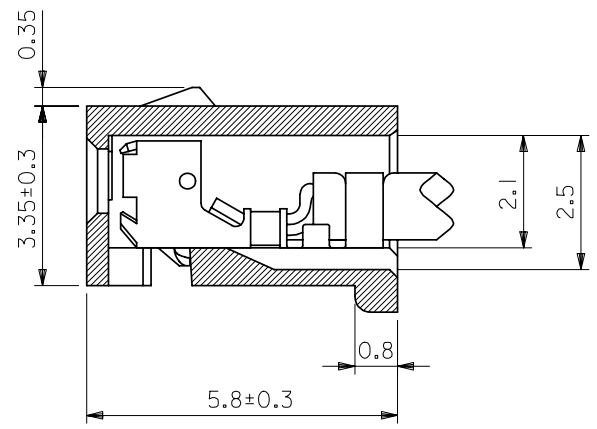

ターミナル装着状態
TERMINAL ASSEMBLY DRAWING
(10:1)

- 注)
NOTE.
- 適合ターミナル: 50011-8*00
ACCEPTS TERMINAL
 - 嵌合相手: 53014-**-10
MATES WITH 53015-**-10
53025-**-10

32	30.9	28	51004-1500	15
30	28.9	26	-1400	14
28	26.9	24	-1300	13
26	24.9	22	-1200	12
24	22.9	20	-1100	11
22	20.9	18	-1000	10
20	18.9	16	-0900	9
18	16.9	14	-0800	8
16	14.9	12	-0700	7
14	12.9	10	-0600	6
12	10.9	8	-0500	5
10	8.9	6	-0400	4
8	6.9	4	-0300	3
6	4.9	2	51004-0200	2
A	C	B	ENG.NO.	極数 CIRCUIT

EC NO. DRWN: CHK: APPR:			EC NO. DRWN: CHK: APPR:			EC NO. DRWN: CHK: APPR:			REDRAWN EC NO. JC2000-0629 DRWN: K.KOHAMA '00/ 3/28 CHK: T.YAMAGUCHI '00/ 3/30 APPR: M.FUKUSHIMA '00/ 3/30			DESCRIPTION MATERIAL 材料 PBT. UL94V-O POLYESTER UL94V-O	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 5:1	DESIGN UNITS ☒ mm ☐ INCH		THIRD ANGLE PROJECTION	☐ mm INCH ☐ INCH mm ☒ mm ONLY	REVISE ON CAD ONLY				
									FINISH 仕上り		10 UNDER 未満		±0.2	DRAWN BY & DATE K.KOHAMA '00/ 3/28		TITLE: 2.0 LOW-PRO REC. HSG.								
											10 OVER 30 UNDER 以上 未満		±0.25	CHECKED BY & DATE T.YAMAGUCHI '00/ 3/30										
									WIRE RANGE 適用電線範囲		30 OVER 以上		±0.3	APPROVED BY & DATE M.FUKUSHIMA '00/ 3/30		MOLEX MOLEX INCORPORATED								
									G	REV 被覆外径	INS. RANGE 被覆外径		ANGLE 角度		±3°	CAD FILENAME S51004.S01		MATERIAL NO. 51004-**-00		DRAWING NO. SD-51004-**-00		SHEET NO. 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	SIZE B