

圖號 DRAWING No. :FP3BCT-A-0

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可


品名 NAME: BUTT CONNECTORS ITEM No. :

MAXIMUM ELECTRIC CURRENT

A. W. G	26	24	22	20	18	16	14	12	10
MAX AMP	5.5	7	9	12	17	18	30	35	50

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
2. WIRE RANGE: 26-22 AWG / 0.1-0.5 mm²
INSULATED COLOR: YELLOW
3. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
4. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
5. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
6. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

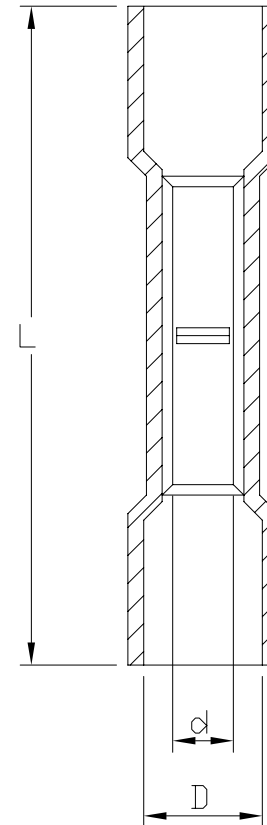

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	L ±1.00	d ±0.30	D ±0.50	t
26-22 AWG 0.1-0.5 mm ²	BCT0.5A	20.0	1.0	2.3	0.4
22-16 AWG 0.5-1.5 mm ²	BCT1A	26.0	1.6	4.1	0.75
16-14 AWG 1.5-2.5 mm ²	BCT2A	26.0	2.3	4.8	0.8
12-10 AWG 4-6 mm ²	BCT5A	28.0	3.6	6.5	0.9

認可 APPROVALS

第三視角
THIRD VIEW

MATERIAL

單位 UNIT

製圖 DRAFT: TINA

INSULATION: NYLON

m/m


設計 DESIGN: KEN

MATERIAL: COPPER TUBE

比例 SCALE

核可 CHECKED: ANDY

TIN PLATING



集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE: 2015.01.05