
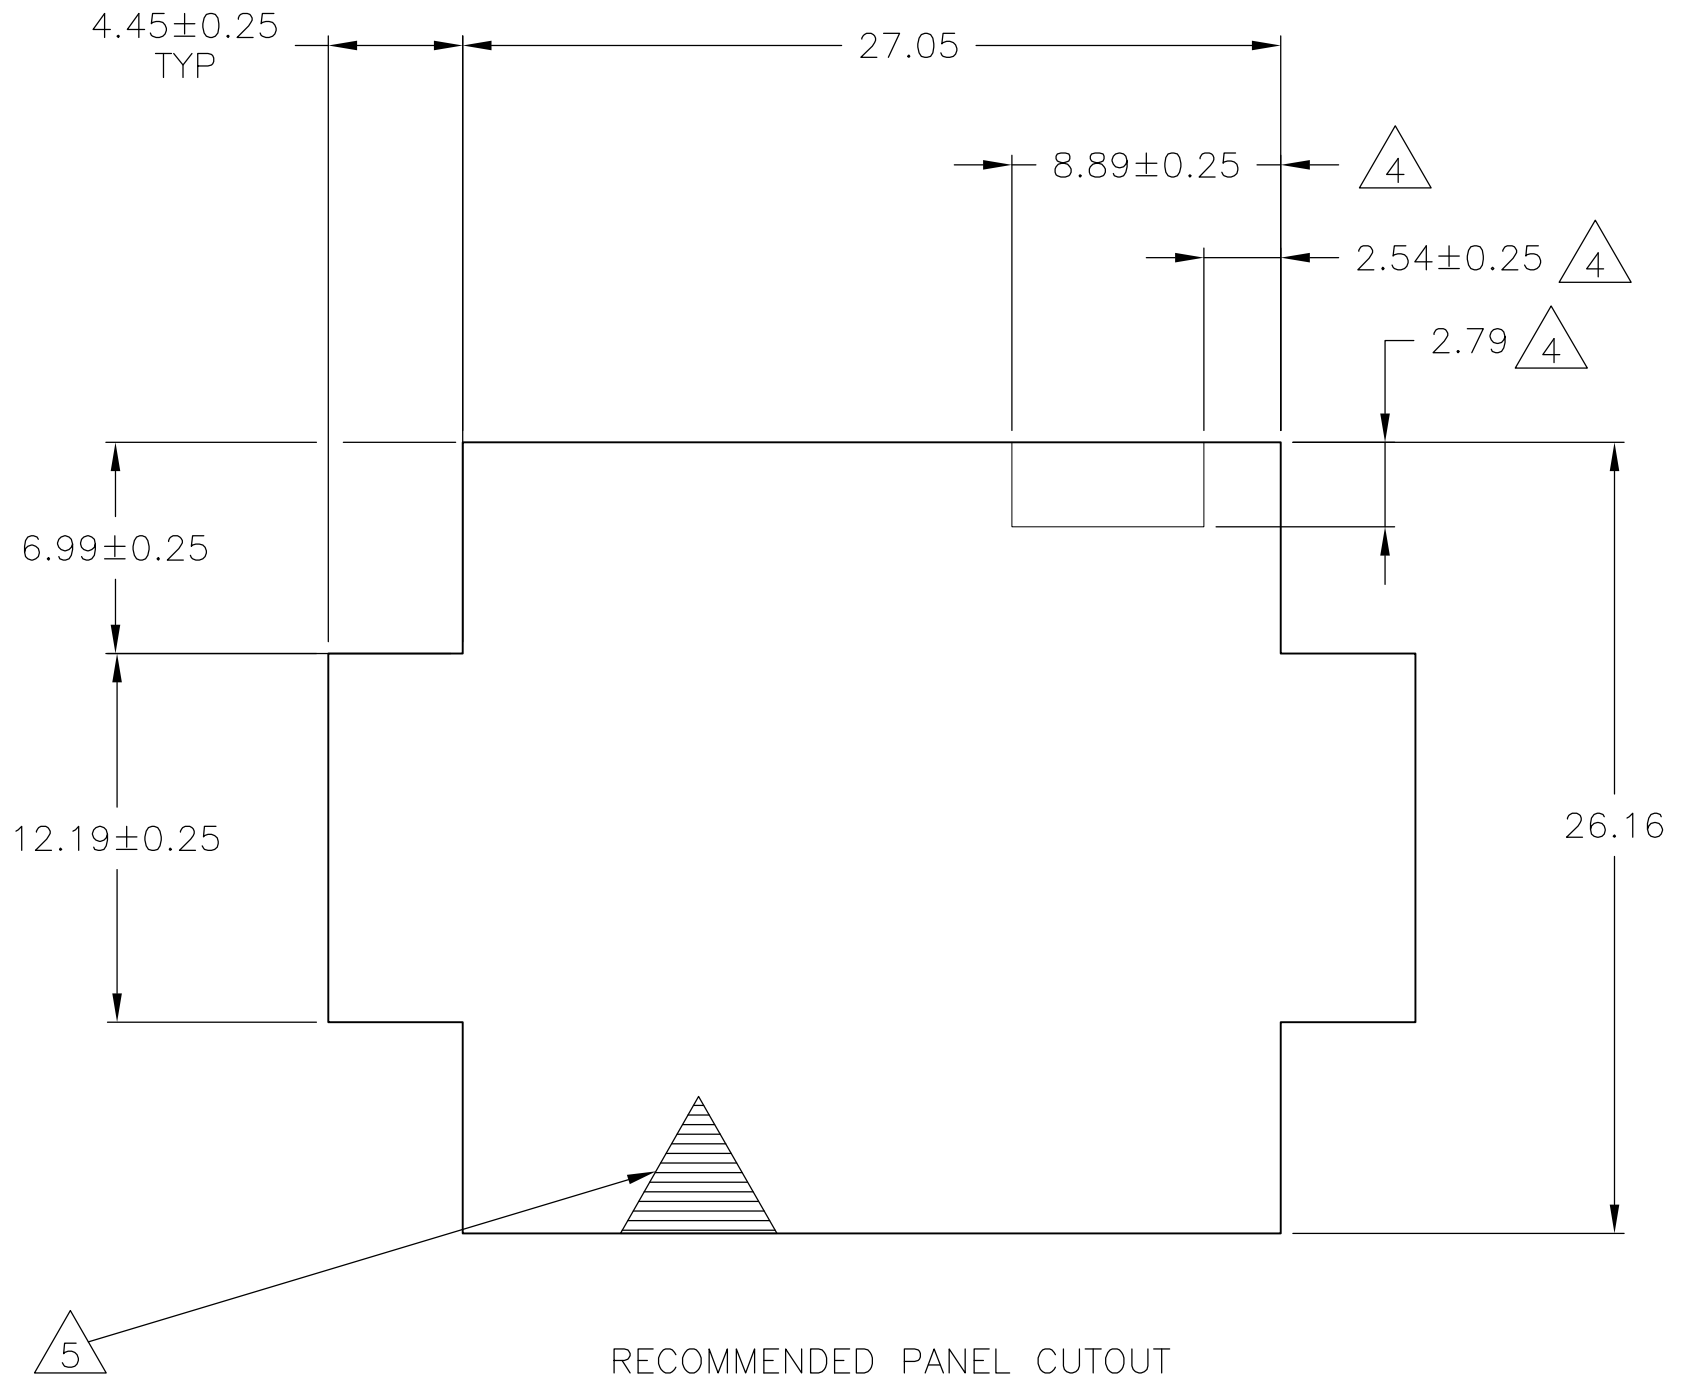
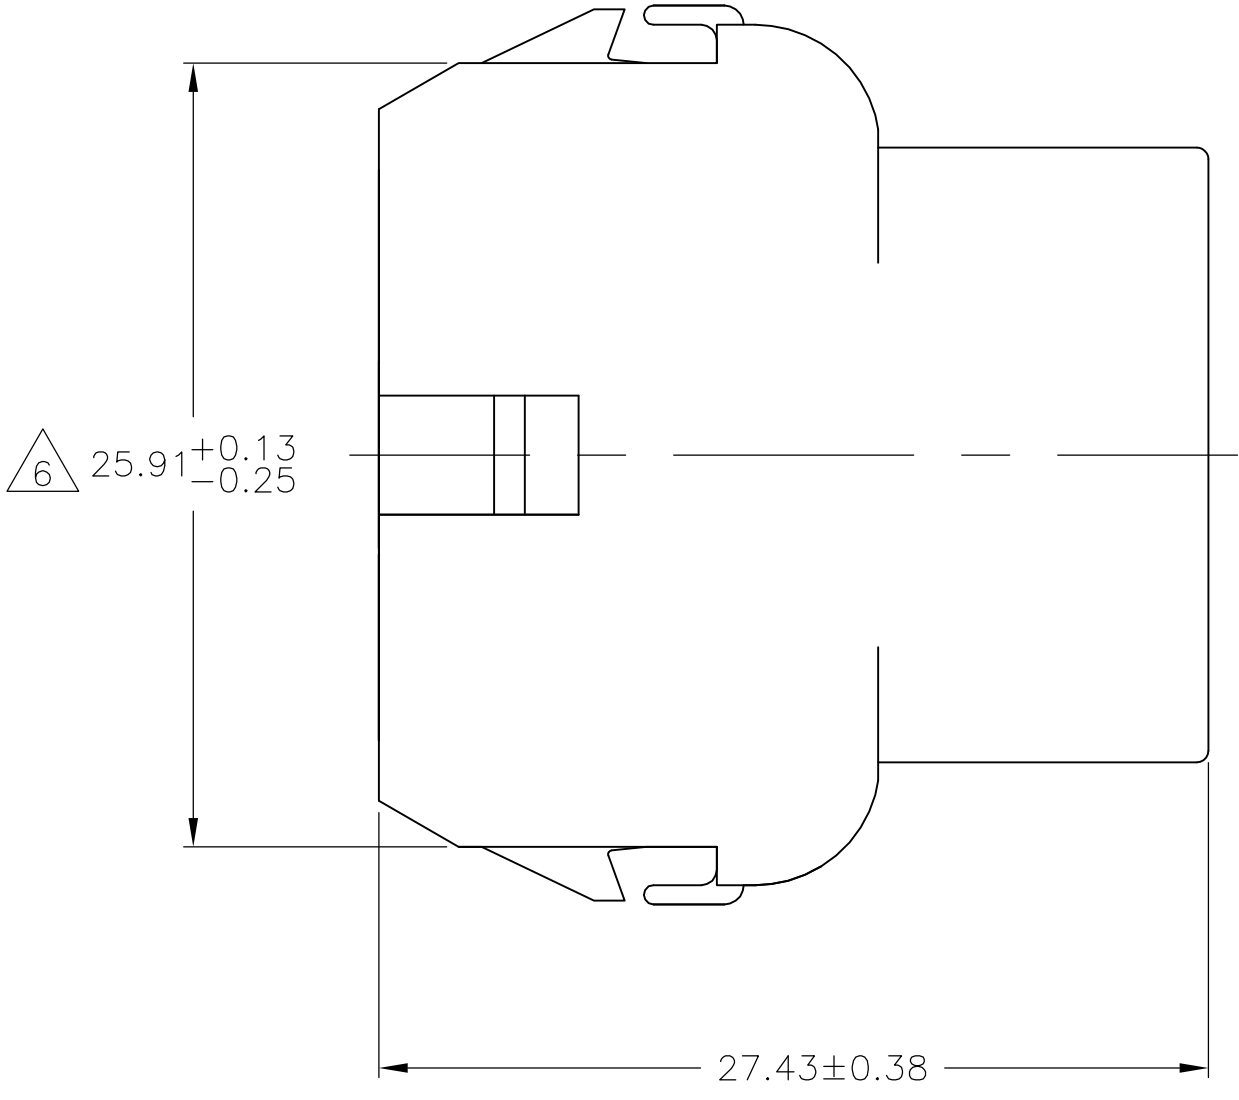
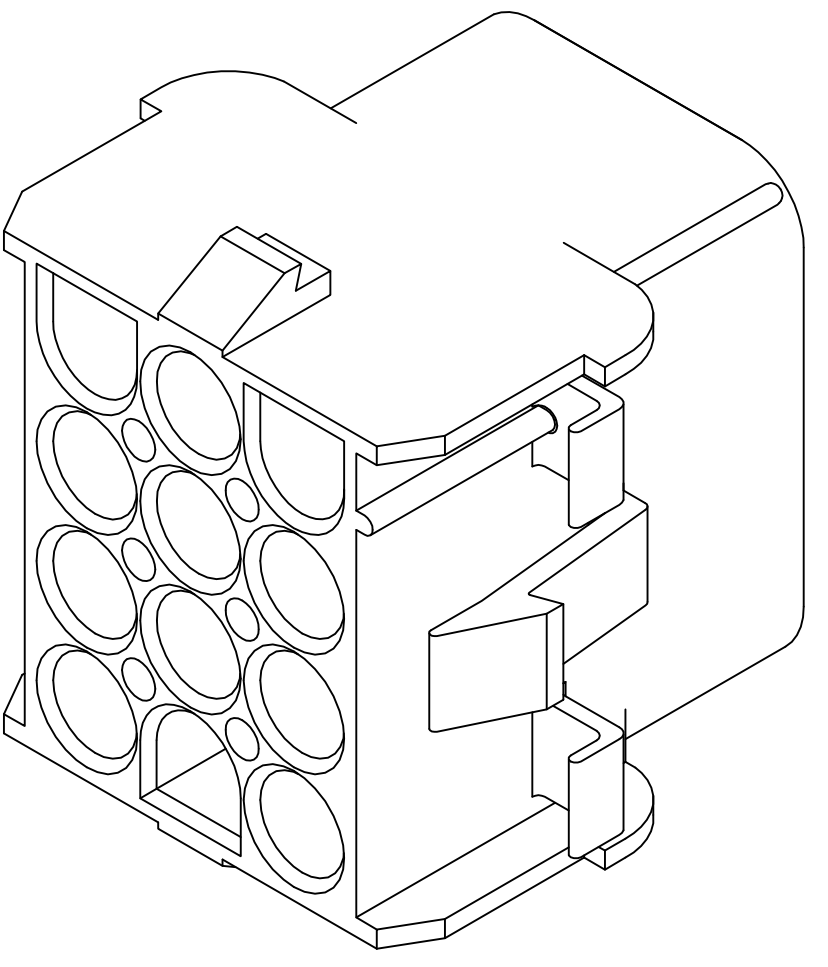
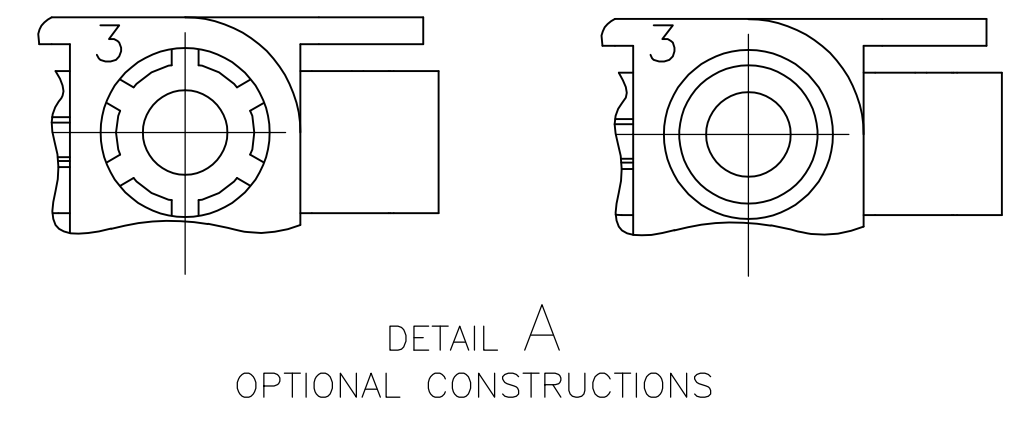
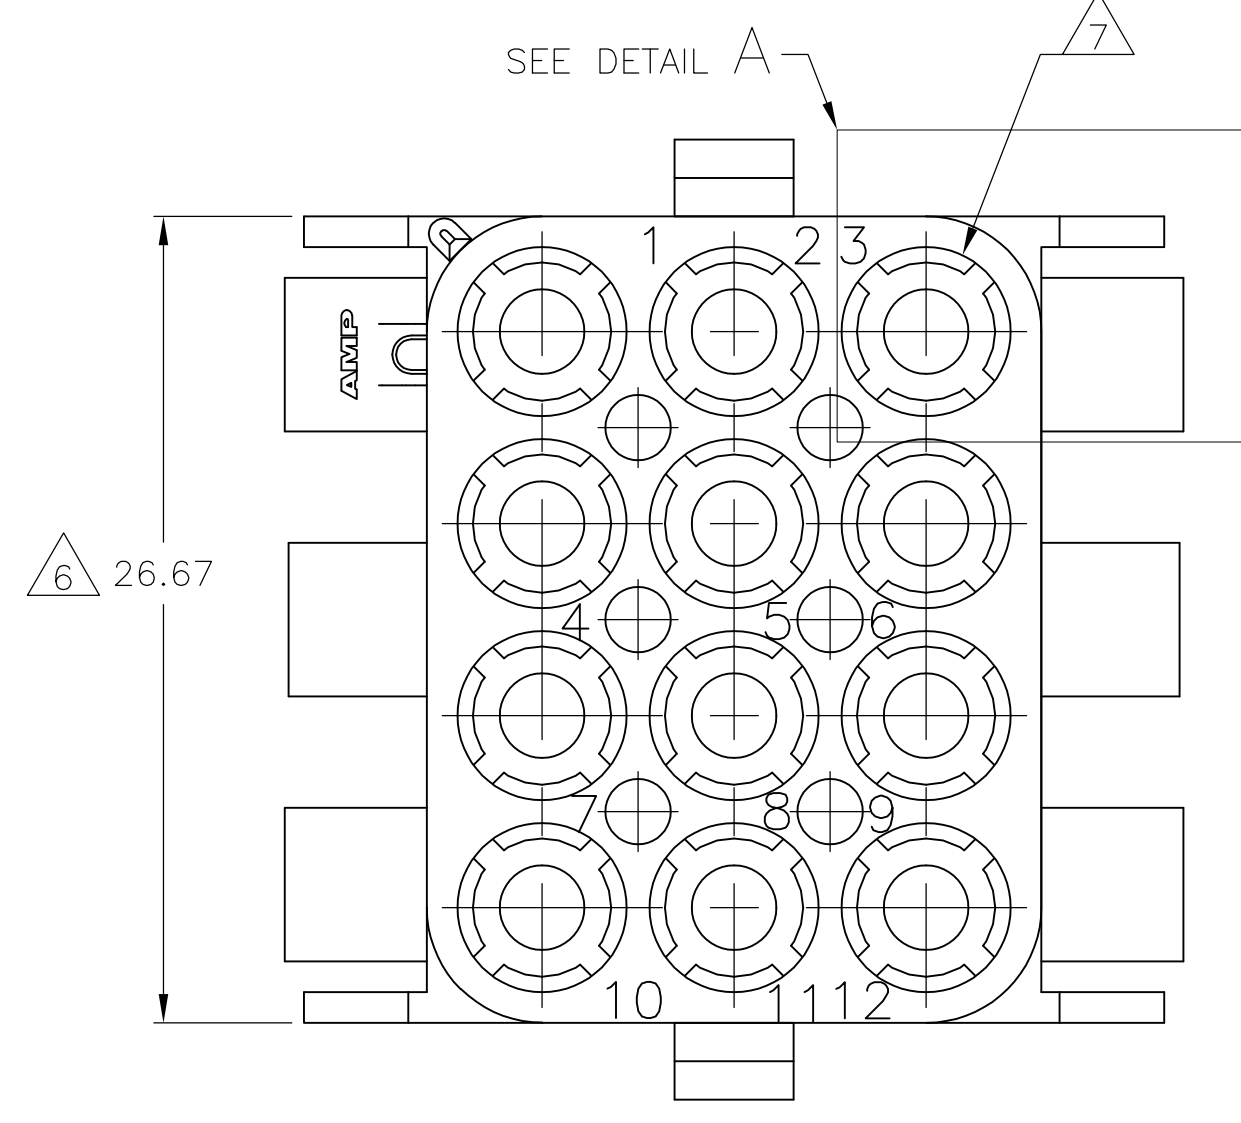
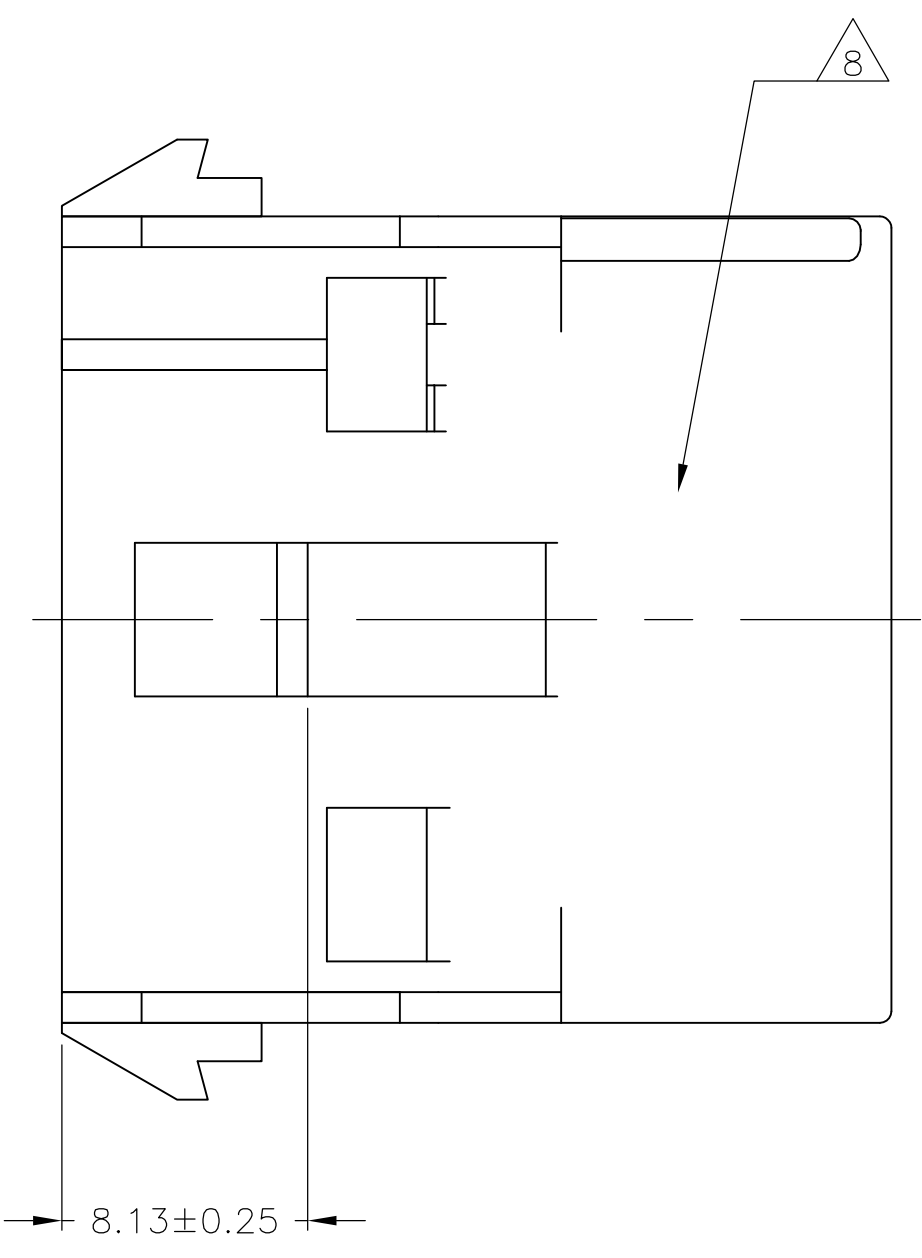


D

C

B


A

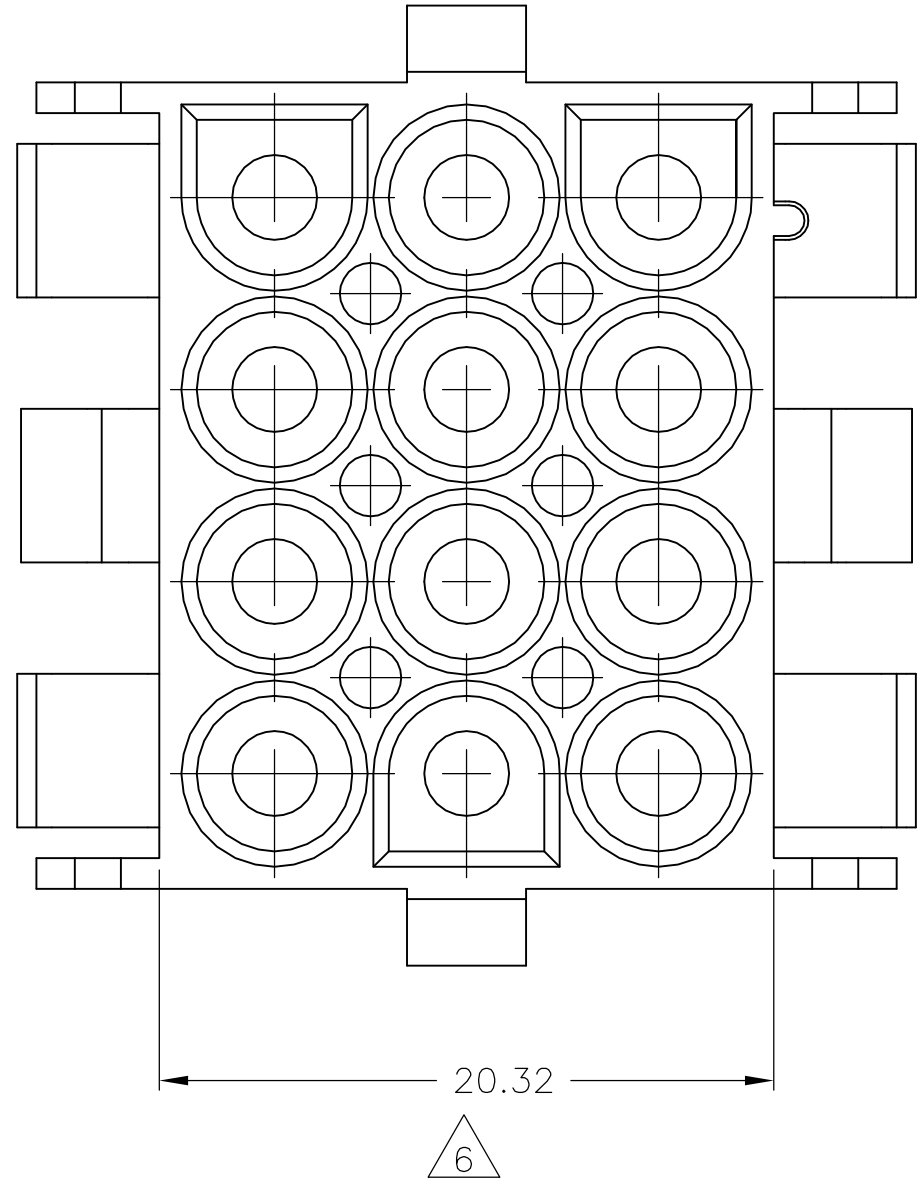

1. MATE WITH APPROPRIATE UNIVERSAL MATE-N-LOCK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.75 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4 OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5 CIRCUIT NUMBER 1 LOCATION.
- 6 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 7 FOUR RIBS EQUALLY SPACED, NO SPECIFOC ORIENTATION.NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIED ORIENTATION, OPTIONAL.
- 8 UNDERWRITERS RECOGNIZED COMPONET LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


9	OBSOLETE	BLACK	1-480709-9
		GRAY	1-480709-8
9	OBSOLETE	BLUE	1-480709-6
		GREEN	1-480709-5
9	OBSOLETE	YELLOW	1-480709-4
		ORANGE	1-480709-3
9	OBSOLETE	RED	1-480709-2
		BROWN	1-480709-1
9	SUPERSEDED BY 1-480709-0	NATURAL	1-480709-0
		COLOR	PART NO

6.99	.275	27.43	1.080
4.45	.175	27.05	1.065
2.79	.110	26.67	1.050
2.54	.100	26.16	1.030
2.29	.090	25.91	1.020
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.89	.350
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			




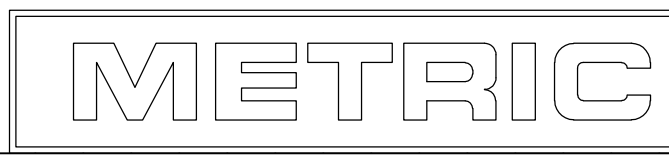


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 29JUL2004	TE Connectivity	
DIMENSIONS: mm		CHK S. RIDGILL 29JUL2004		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 29JUL2004	NAME	
0. PLC ± -		PRODUCT SPEC	CAP, 12 CIRCUIT, UNIVERSAL MATE-N-LOK™	
1. PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
2. PLC ± 0.13		WEIGHT -	A100779C=480709	
3. PLC ± -		RESTRICTED TO		
4. PLC ± -		CUSTOMER DRAWING		
ANGLES ± ± 0°30'		SCALE 4:1 SHEET 1 OF 2 REV AL2		
MATERIAL NYLON, UL94V-2		FINISH -		

LOC	DIST	REVISIONS				
CM	00	REV	LTR	DESCRIPTION	DATE	OWN
				SEE SHEET 1		

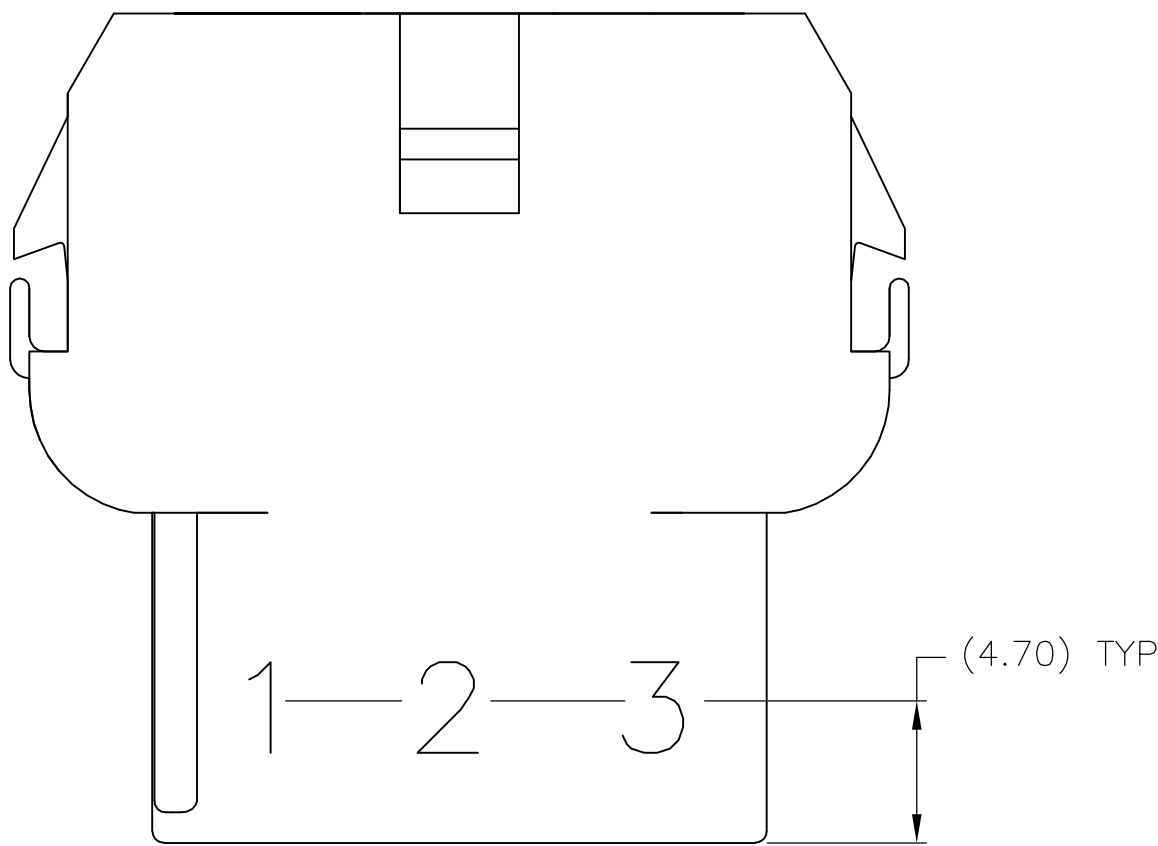

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE);CLARIFICATION MARKS UNDER THE 6 & 9.
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

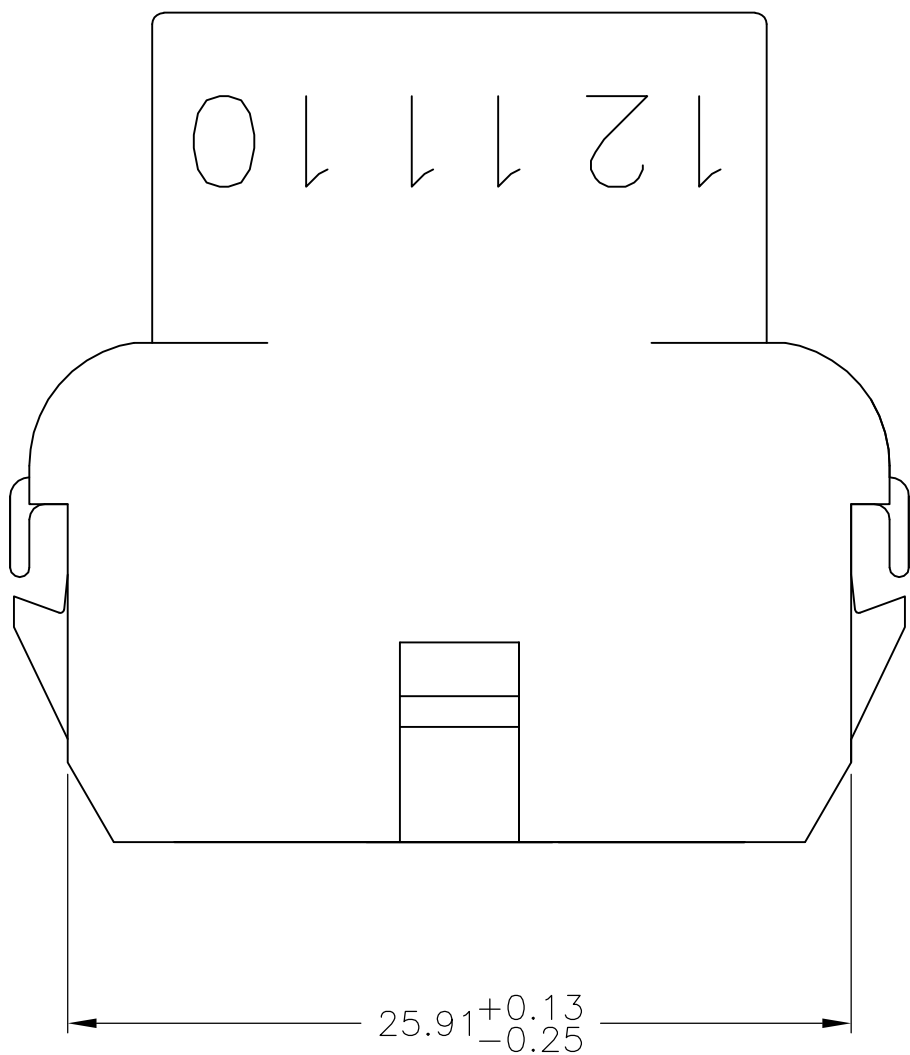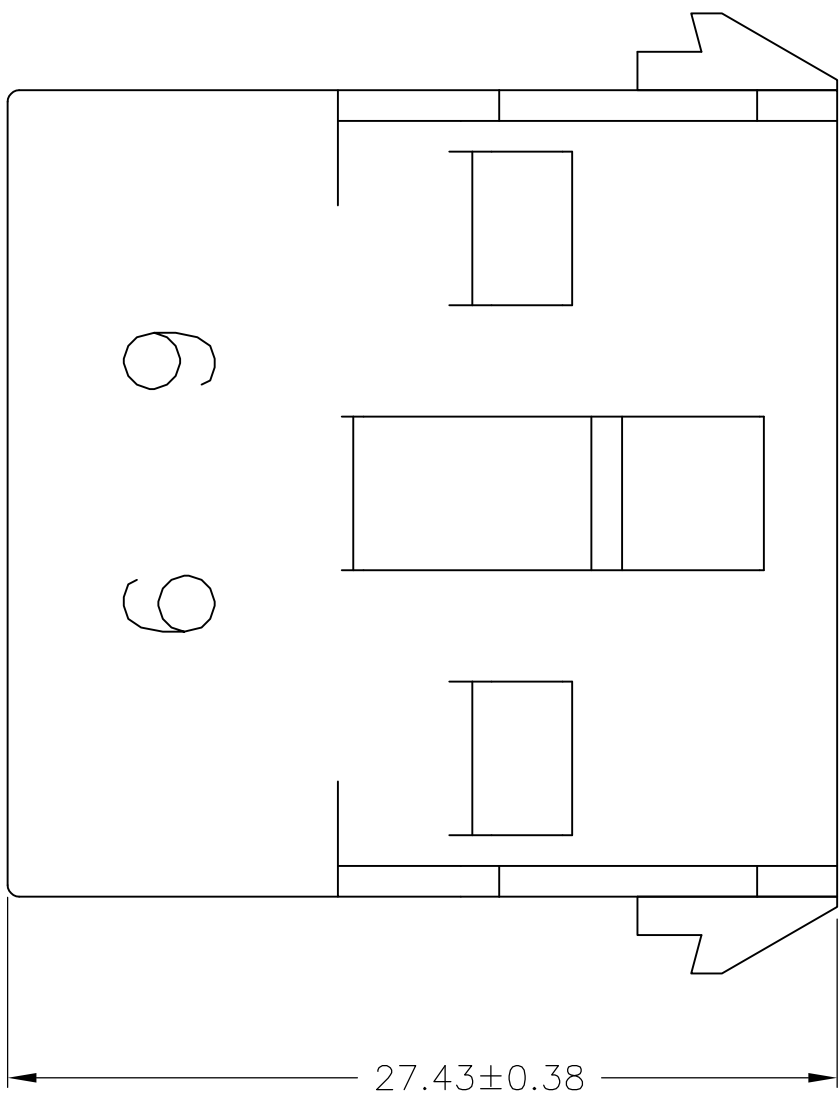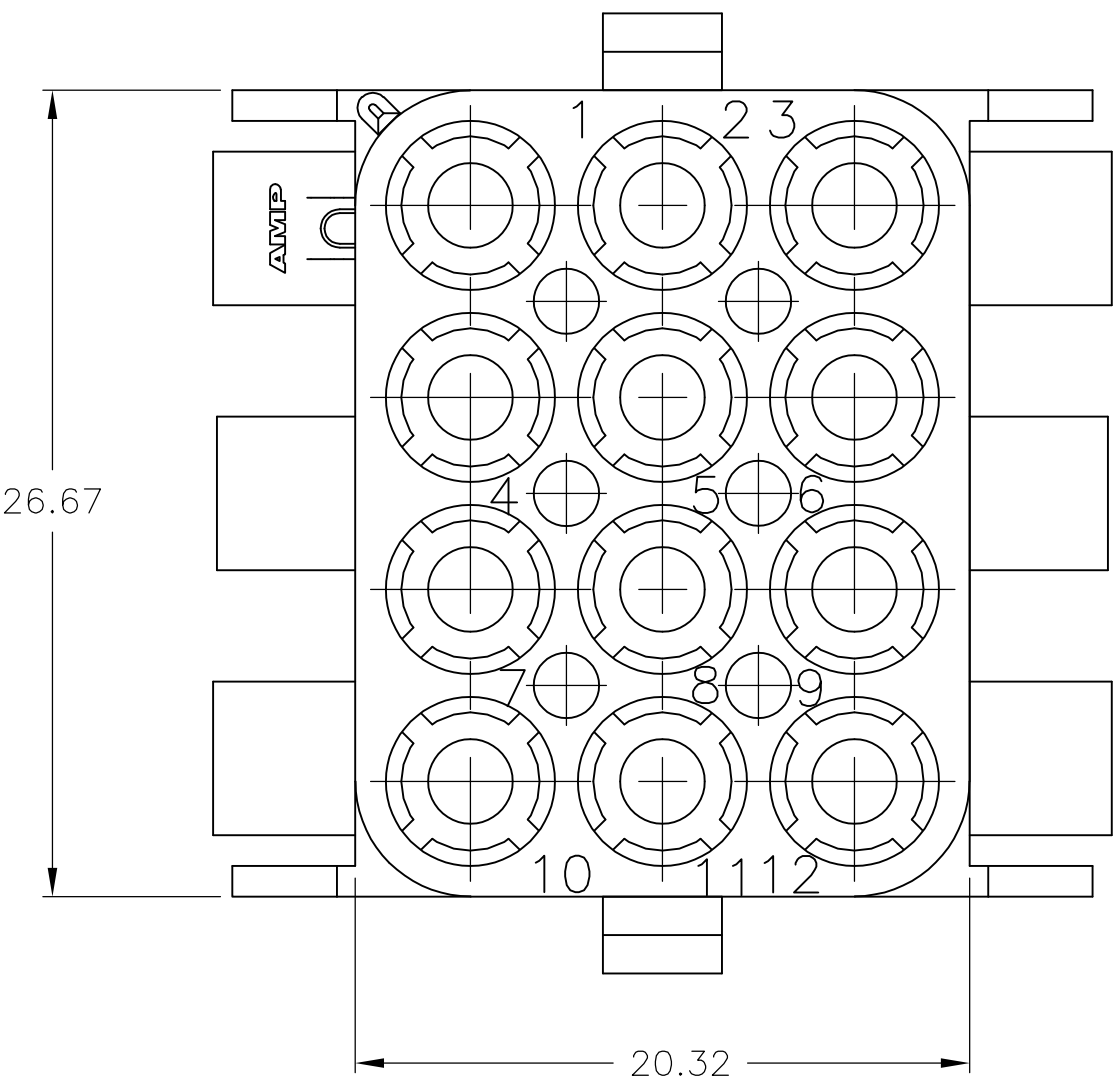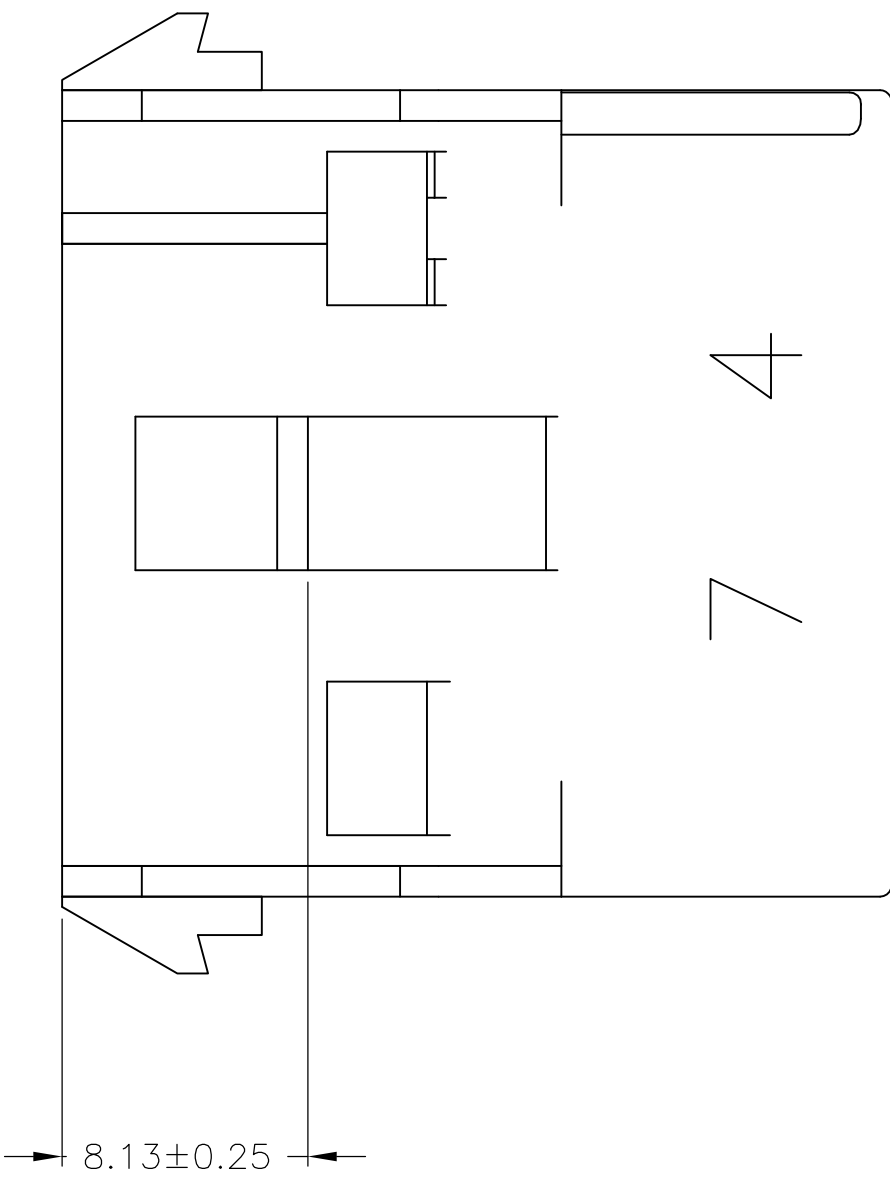

5.08	.200	—	—
4.70	.185	27.43	1.080
3.18	.125	26.67	1.050
0.38	.015	25.91	1.020
0.25	.010	20.32	.800
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK S. RIDGILL APP'D S. RIDGILL	29JUL2004 29JUL2004 29JUL2004	TE Connectivity	
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME	CAP, 12 CIRCUIT, UNIVERSAL MATE-N-LOK™	
mm	0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 3 PLC ± — 4 PLC ± — ANGLES ± 0°30'	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL NYLON, UL94V-2	FINISH —	WEIGHT —	A1	00779	480709
CUSTOMER DRAWING		SCALE	1:1	SHEET	2 OF 2
		REV	AL2		