

QH36S-2 100-105W

MWT Mono PERC Flexible Module

18.3%

Module efficiency

3year

Quality/Performance Warranty

※ 1st year degradation less than 2.5%,
3 years linear power output 96.13% guaranteed.

Insured by LLOYD'S
LLOYD'S



Features

- Light and Thin**
1.7kg weight, match various requirements for low-load projects
- High Efficiency and Reliability**
Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions
- Customizable**
Customized design for different scenarios
- Convenient Installation**
Easy installation and convenient transportation with lower cost
- Ultra Flexible**
Ultra-thin silicon wafers with advanced organic polymer encapsulation materials, minimum bending radius reach 0.30m, fit all kinds of curved surfaces perfectly
- Lead-free**
Eco-friendly PV design achieves lead-free MWT module without soldering materials

Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP100QH36S	SPP105QH36S
Max-Power(Pm)	W	100	105
Power Tolerance	W	0~+5	
Max-Power Voltage(Vm)	V	20.4	20.6
Max-Power Current(I _m)	A	4.91	5.11
Open-Circuit Voltage(Voc)	V	24.6	24.8
Short-Circuit Current(I _{sc})	A	5.22	5.42
Effective Module Efficiency(η _m)	%	17.5	18.3

STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25°C

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP100QH36S	SPP105QH36S
Max-Power(Pm)	W	72	76
Max-Power Voltage(Vm)	V	18.5	18.7
Max-Power Current(I _m)	A	3.89	4.06
Open-Circuit Voltage(Voc)	V	22.5	22.7
Short-Circuit Current(I _{sc})	A	4.21	4.38

NMOT: Irradiation 800W/m², Ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P _{max}	-0.36%/°C
Temperature coefficient of V _{oc}	-0.28%/°C
Temperature coefficient of I _{sc}	0.06%/°C

Mechanical Characteristics


Installation Module Dimension (L×W×H)	1075mm×535mm×2.3mm
Weight	1.7 kg
Back material	Back Sheet(black/white)
Cell (quantity / material / type / dimensions)	36(6x6)/Mono /166*83mm /φ223mm
Junction box(Protection degree)	IP68
Junction box/Nameplate(position)	Front or Back(Optional)
Cable (length/cross-section area)	Customizable/ 4mm ²
Connector	MC4 Compatible

Package


Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HQ	2160	120

I-V Curve

I-V Curves of SPP100QH36S at different irradiance

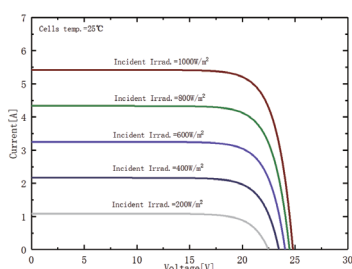

I-V Curves of SPP100QH36S at different cell temperature

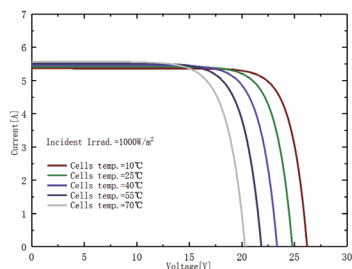

Module Size

