



10 9 8 7 6 5 4 3 2 1

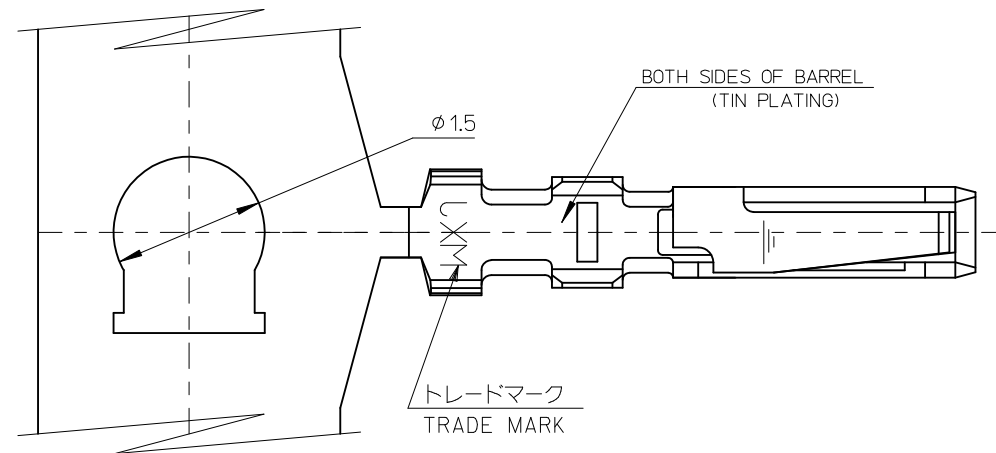


NOTES.


1. 適合ハウジング：51146シリーズ
APPLICABLE HOUSING：51146 SERIES
2. メッキ仕様（前メッキ）
PLATING (PRE-PLATING)
接点部金メッキ：0.2 μ m MIN.
CONTACT AREA GOLD PLATING
バレル外面 錫メッキ：0.9 μ m MIN.
OUTSIDE OF BARREL TIN PLATING
下地ニッケルメッキ：1.0 μ m MIN.
UNDER PLATING NICKEL PLATING
3. 本製品はコンタクト部 金メッキ品である。
THIS PRODUCT IS GOLD PLATING FOR CONTACT POINT.
4. 本製品はバレル両面 錫メッキ品である。
THIS PRODUCT IS TIN PLATING BOTH SIDES A BARREL.
5. ELV AND RoHS COMPLIANT.

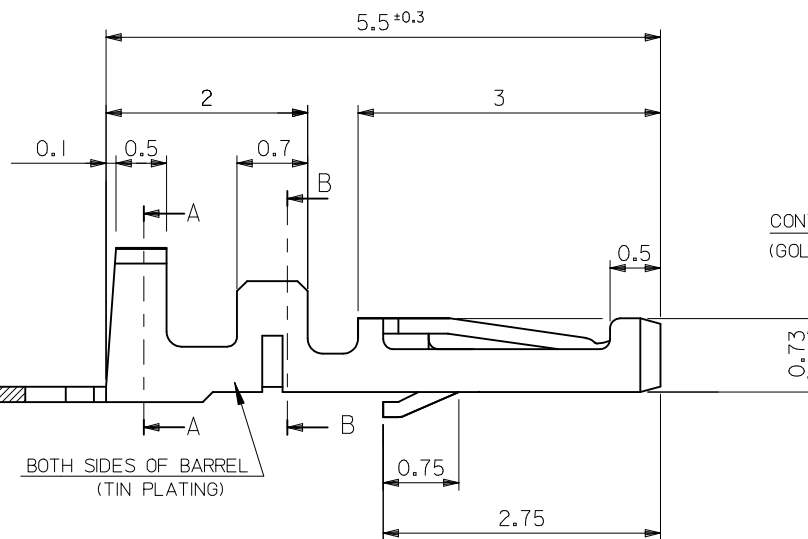

CONTACT POINT
(GOLD PLATING)



SECT. A-A



SECT. B-B

MATERIAL
リン青銅 下地ニッケル、部分金メッキ、錫メッキ品
PHOSPHOR BRONZE t=0.15
SELECTIVE GOLD PLATING
SELECTIVE TIN PLATING
UNDER NICKEL PLATING

FINISH
SEE NOTE

WIRE RANGE
AWG#28-30

INS. RANGE
 $\phi 0.5 - 0.9$

REVISED
EC NO: J2011-0919
DRWN: NITO 2011/02/08
CHKD: SAKIYAMA 2011/02/08
APPR: NUKITA 2011/05/09
D

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	± 0.2
10 OVER 30 UNDER	± 0.25
30 OVER	± 0.3
ANGULAR	$\pm 1^\circ$
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
NITO	2011/02/08
CHECKED BY	DATE
SAKIYAMA	2011/02/08
APPROVED BY	DATE
NUKITA	2011/05/09
MATERIAL NO.	
ENTER PART	
SIZE	A3

SCALE
20:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

1.25 W/B CONN
CRIMP RECEPTACLE

MOLEX INCORPORATED

SD-50641-001

1 OF 1

50641-8141	バラ状 LOOSE
50641-8041	連鎖状 CHAIN
MATERIAL NO.	端子形状 FORM